

Complete Shower Room Installation & Operation Manual

9041

SIZE: 135X135X220cm



## Cautions in Installation and Using

Thanks for selecting our shower room series. To guarantee safe and normal operation as well as prolong service lifetime. Pls read Instruction carefully before installation.

Note: Constar is dedicated to improving products quality, find something new in what is old, we would if there is difference in the Instruction until further notice. Any discomfort, we ask your pardon.

### Directory









1. Tool contents	-----	3
2. Accessory list	-----	4-6
3. Pipe and drain installation drawing	-----	7
4. Installation Procedure	-----	8-19
5. Notes	-----	20
6. Delivery and storage notice	-----	20
7. Trouble shootings	-----	21

## 7. Trouble shootings















Troble	Cause	Remedy
No power	1.Electric power don't connect well,leak swtich is cut off.	Access to power
	2.Fuse wire is broken,switch of control panel is failure.	Maintain or replace
	3.GFCI is out of work	Check GFCI
No head shower	1.water pressure is abnormal	Check water pressure
	2.Cold and hot water switch is closed.	Turn on the cold and hot water switch
	3.chocking nozzle	Clean
Water pipe leakage	1.Seal ring damaged	Replace seal ring
	2.Tie in don't connect well	Connect it again
No radio	1.Connecting wire is cut	Make connection
	2.Loudspeaker is broken	Replace a new one
Phone unuable	1.Telephone wire don't connect well	To make contact telephone line
	2.Control panel is broken	Maintain or replace
No light	1. Bulb is broken,ballast is broken	Replace
	2.Break of ballast	To make contact
	3.Control panel is broken	Maintain or replace
No exhaust	1.Fan is broken	Replace
	2.Tie-in is not connect well	To make contact
	3.Control panel is broken	Maintain or replace

If complete shower room cant work normally, please check it as compare above then obstacle avoidance.  
If customers cant make sure the cause of obstacle or lack of ability mantianance.Please contact distributer.

## 1. self-provide tool

Name	Tool
Track level bar	
Tape measure	
Ajustable spanner	
Rubber hammer	
Phillips srewdriver	
Scissors	
Glass cement	
electric drill	
3mm aiguille	
6mm aiguille	
tap drill	

## 2. Partial accessory list

Item	Name	Accessory	Quantity
1	(1. 1) Tub		1
	(1. 2) Middle Backboard		1
	(1. 3) Roof		1
2	(2. 1) Backboard glass		1
	(2. 2) Backboard glass		1
	(2. 3) Backboard glass		1
	(2. 4) Backboard glass		1
	(2. 5) Arch fixed door glass		2
	(2. 6) Arch flexible door glass		2
3	(3. 1) Upper rail		1
	(3. 2) Bottom rail		1
	(3. 3) Side upright column		2
	(3. 4) Backboard upright column		2
	(3. 5) Front upright column		2

(3)

## 5. Notes


1. It is unadvisable to take a shower after drunk.
2. It is unadvisable to have a shower immediately after acute sports.
3. Please avoid bath or shower in morning.
4. Keep the temperature of dressing room near to the bathroomS
5. If you feel uncomfortable while having a shower , you should go out of the shower room as soon as possible.
6. The time of shower is advisable to be between 15 minutes and 20 minutes, no longer .
7. Drink water to supplement moisture after shower or bathing.
8. People who suffer from heart disease, high blood pressure, diabetes or who feel unwell or pregnant woman are unadvisable to have bathing ,massage or shower.

## 6. Delivery and storage notice


- 1, It is prohibited to store organic solvent together, such as formic acid and methanol.
2. Handle with care if it need transport. Heavy stress, mechanical impact and sharp pounding is prohibited.
3. It should keep it dry and airy and make sure there is no etchant gas.

(20)

## 4. Installation Procedure



13. Connect cold and hot water with installed shower room by adjustable spanner, then plug in .

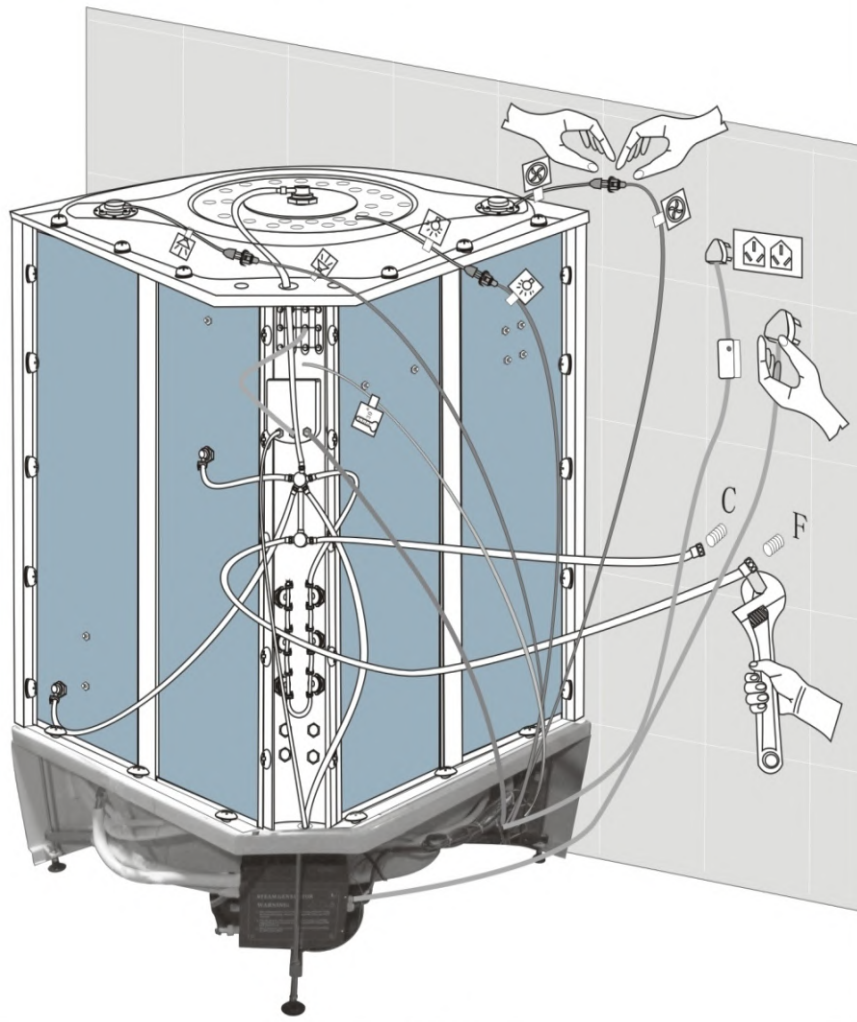









(19)

## 2. Partial accessory list

Item	Name	Accessory	Quantity
4	(4. 1) Double wheel(Upper)		4
	(4. 2) Double wheel(Bottom)		4
5	(5) Knob		2
6	(6) Foot massager		1
7	(7) Soap container		1
8	(8) Hand shower		1
9	(9) Top shower		1
10	(10. 1) hand shower		1
	(10. 2) hand shower tube		1
	(10. 3) Lifting rod		1


(4)

## 2, Partial accessory list

Item	Name	Accessory	Quantity
1 1	Cold and hot water hose		2
1 2	(12. 1) Magnetic strip		2
	(12. 2) Waterproof belt		2
	(12. 3) U style thong		12
1 3	( 13) Glass positioning fixture		8
1 4	(14. 1) St 4*20mm self tapping screw		8
	(14. 2) St 4*16mm self tapping screw		32
	(14. 3) St 4*10mm self tapping screw		12


(5)

## 4. Installation Procedure

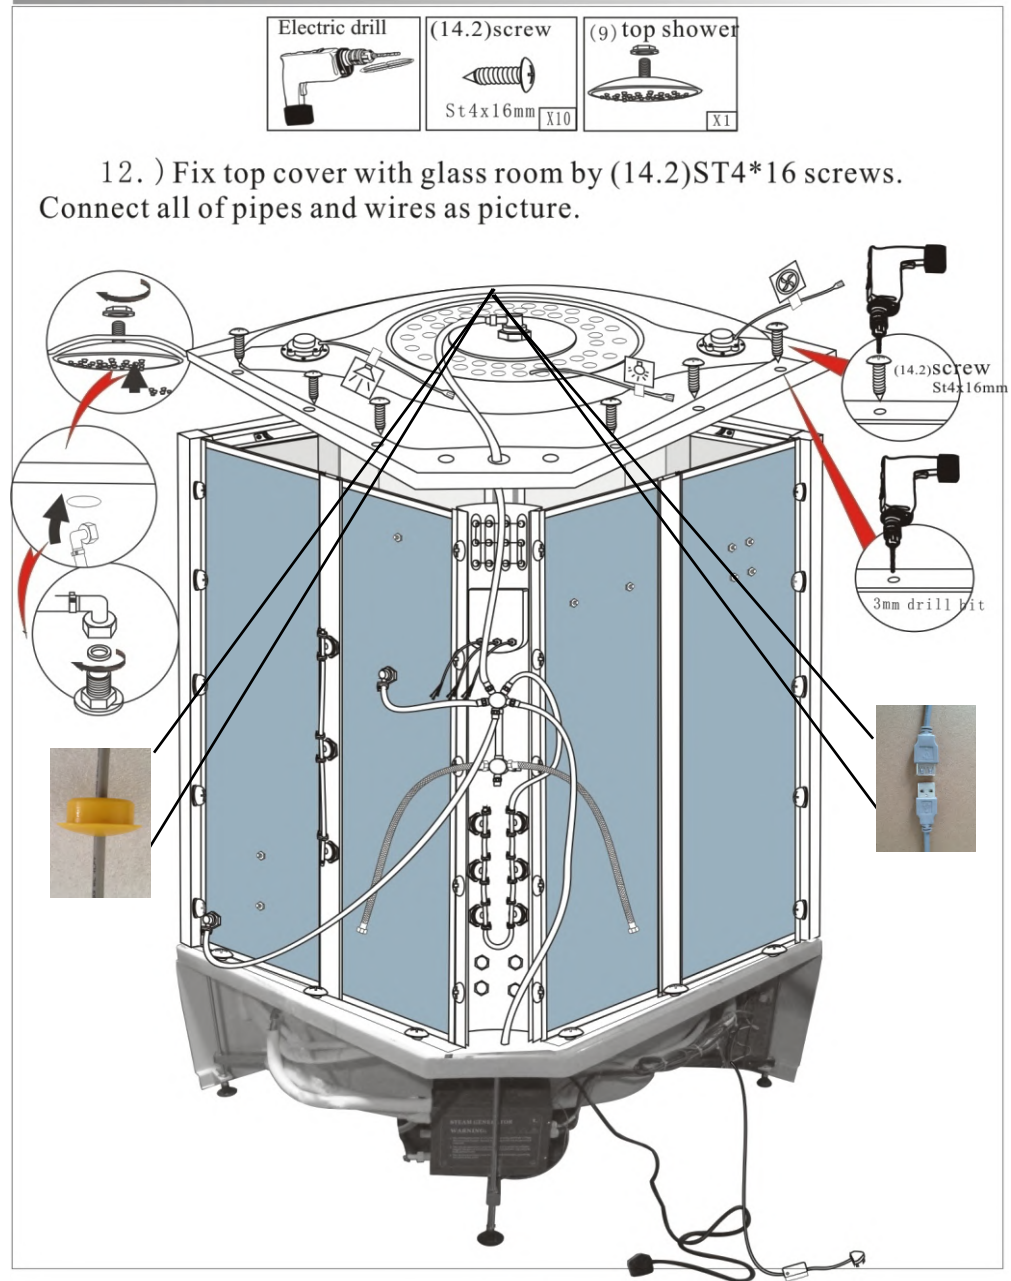


(18)

## 4. Installation Procedure



11. ) Put the back board and glass room on the tub, connect them and fix them by screw (14.2)

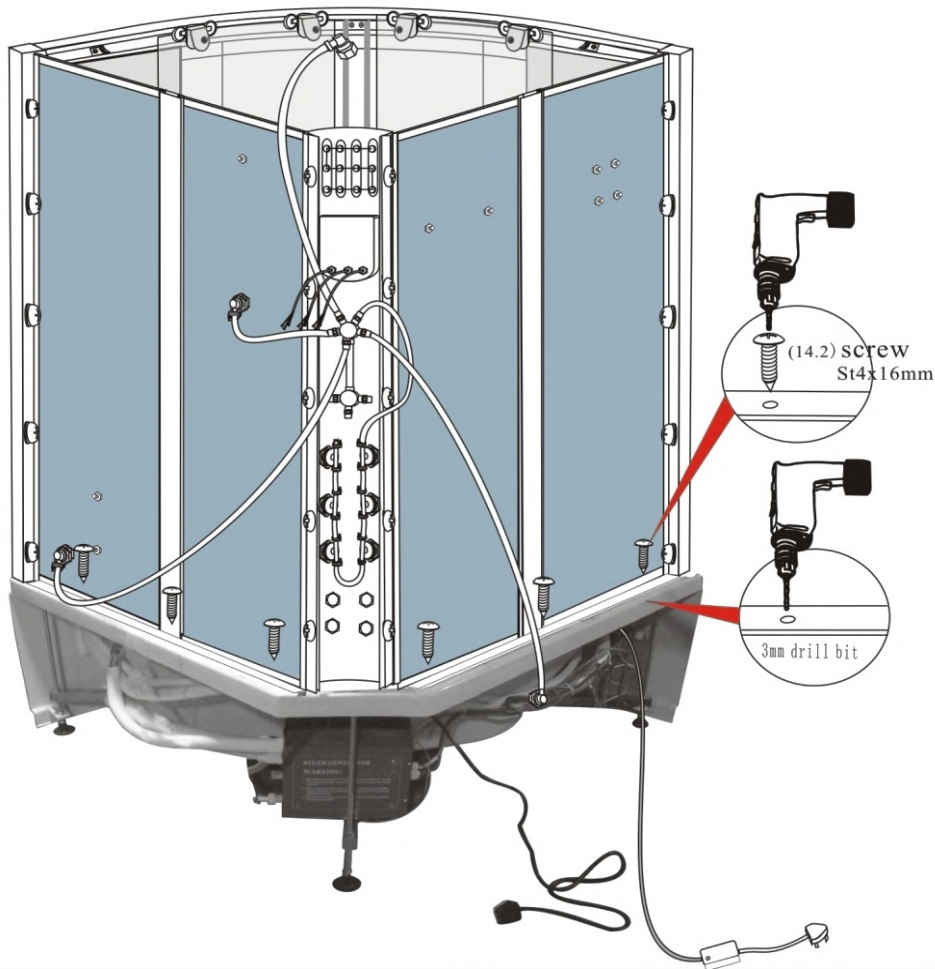

(17)

## 3. Pipe and drain installation drawing

Dimension: 135\*135\*220cm

C=Cold water inlet


H=Hot water inlet

D=Drain




(6)

## 4. Installation Procedure




1.) Put track level bar on the tub, and adjust foot's screw by adjustable spanner, and keep it to the leveling

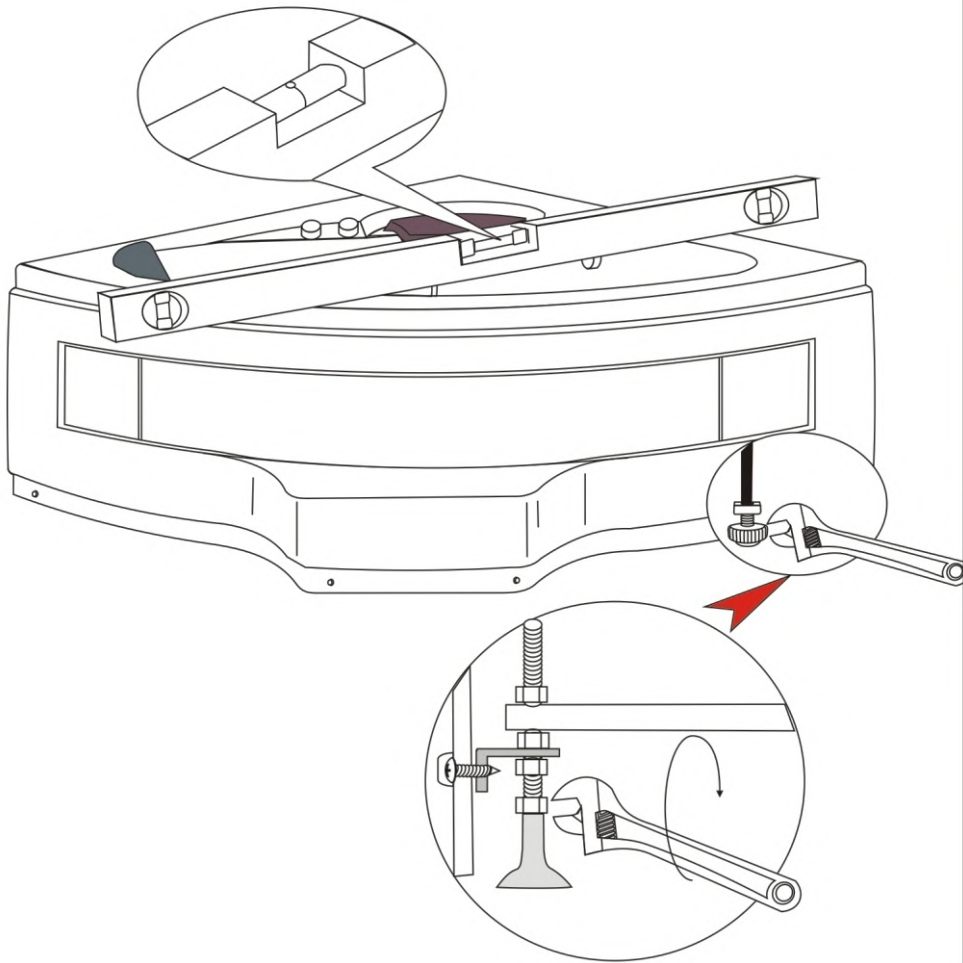


(7)

## 4. Installation Procedure




10.) Connect back board and glass room by screw (14.2), fit the pipes.

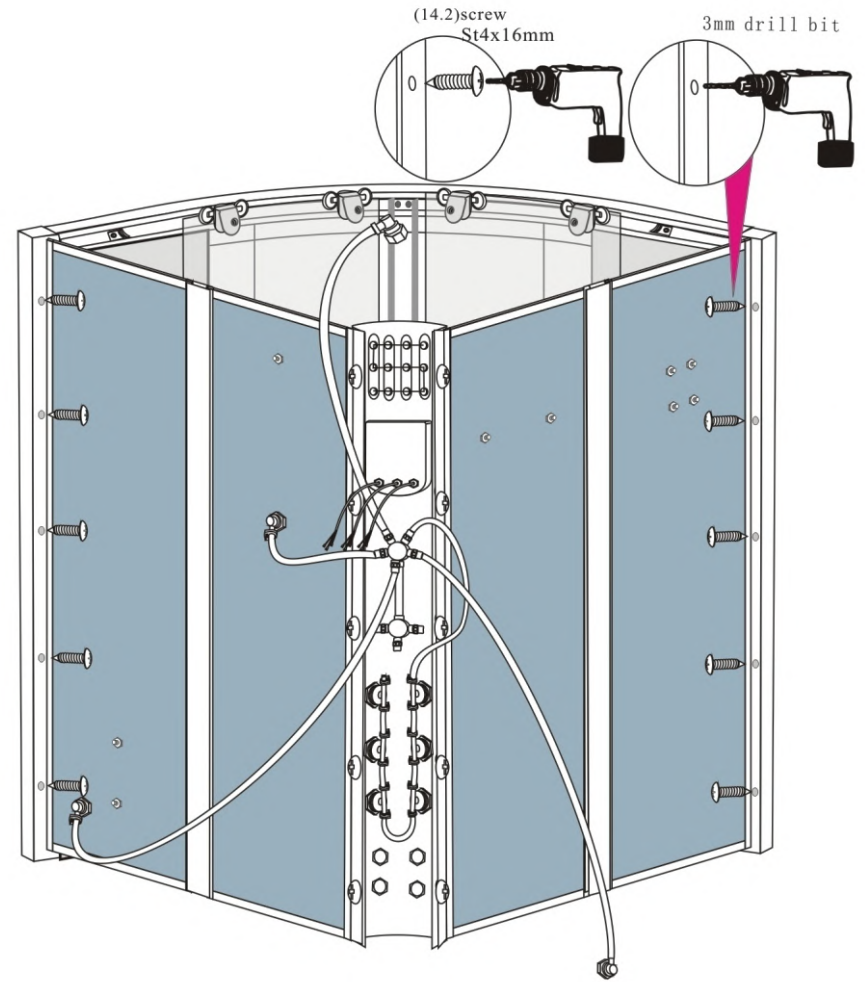


(16)



## 4. Installation Procedure




9.) Fit handle(5) into the door holes, fix them by its screws. Fix the location bar and magnetic seal, blocking water seal.

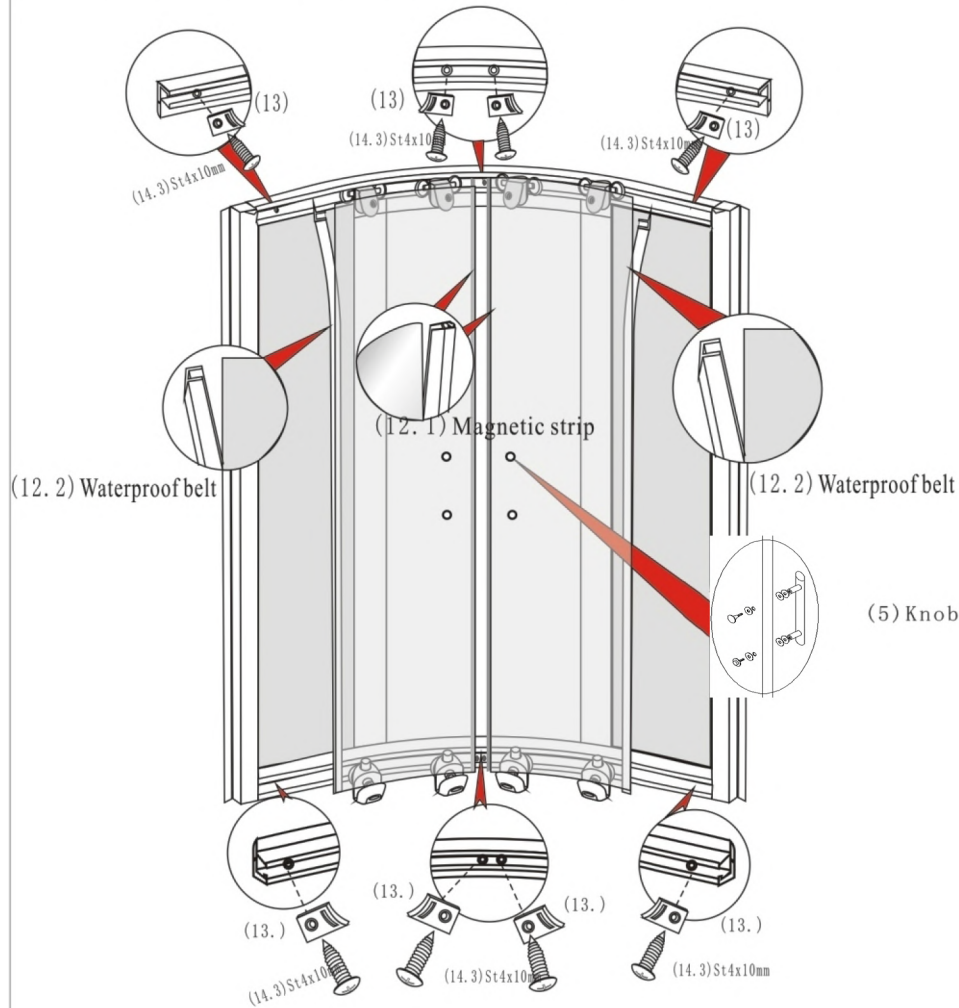


(15)

## 4. Installation Procedure

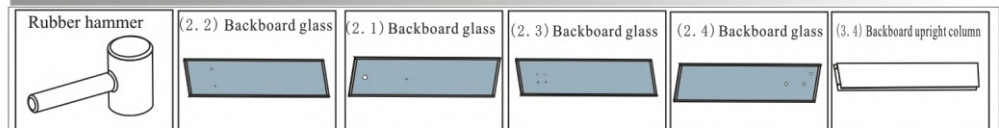


2.) Connect each 2 pieces of glass with middle upright aluminum panel, using hammer to make them tight.

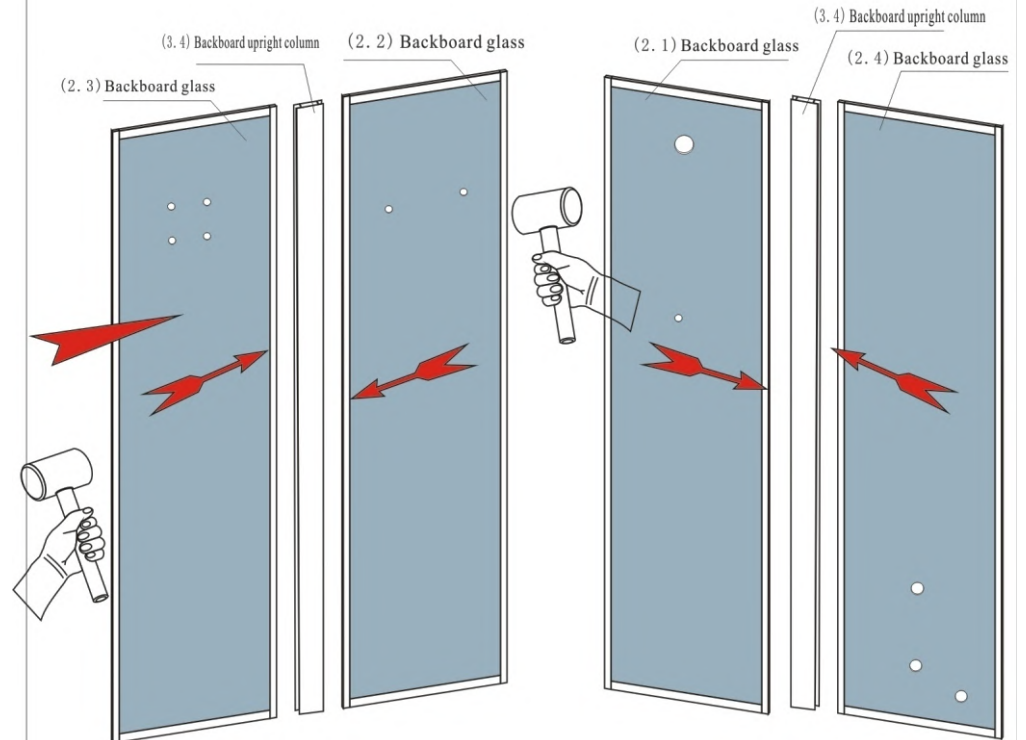


(8)

## 4. Installation Procedure




3. ) Connect the aluminum panel and 2 pieces of back board glassby screws.

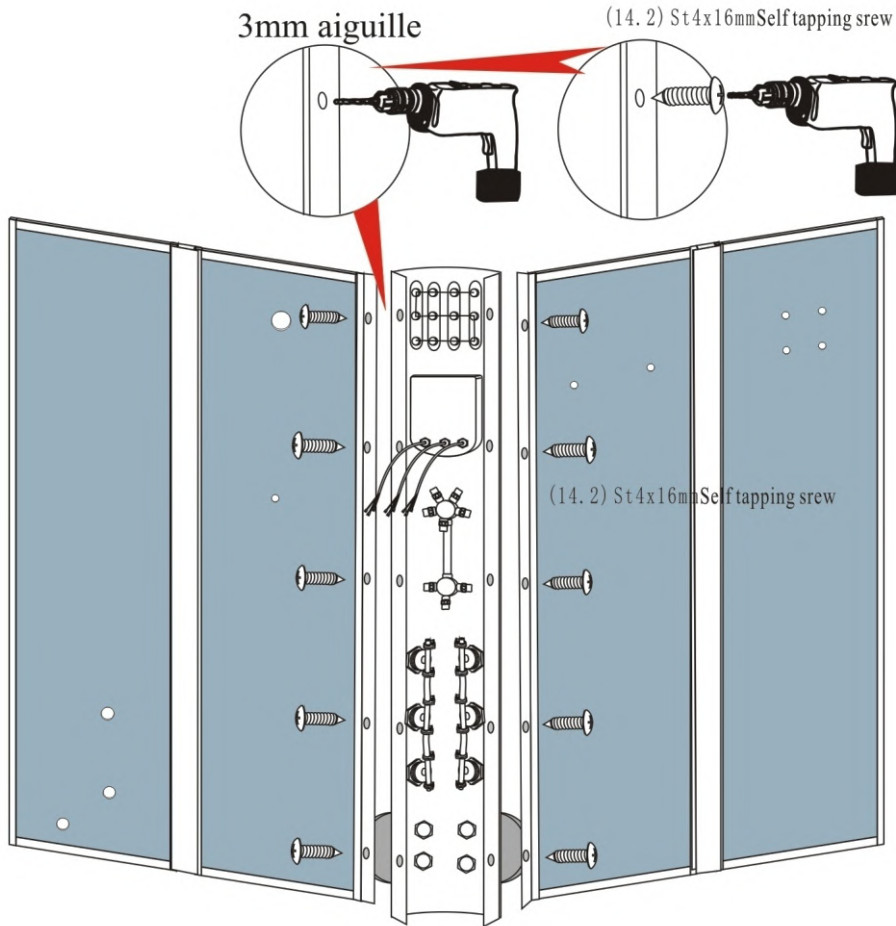


(9)

## 4. Installation Procedure




8. ) Put the double-roller into glass door hole,fix them,then hang the door into the rails.

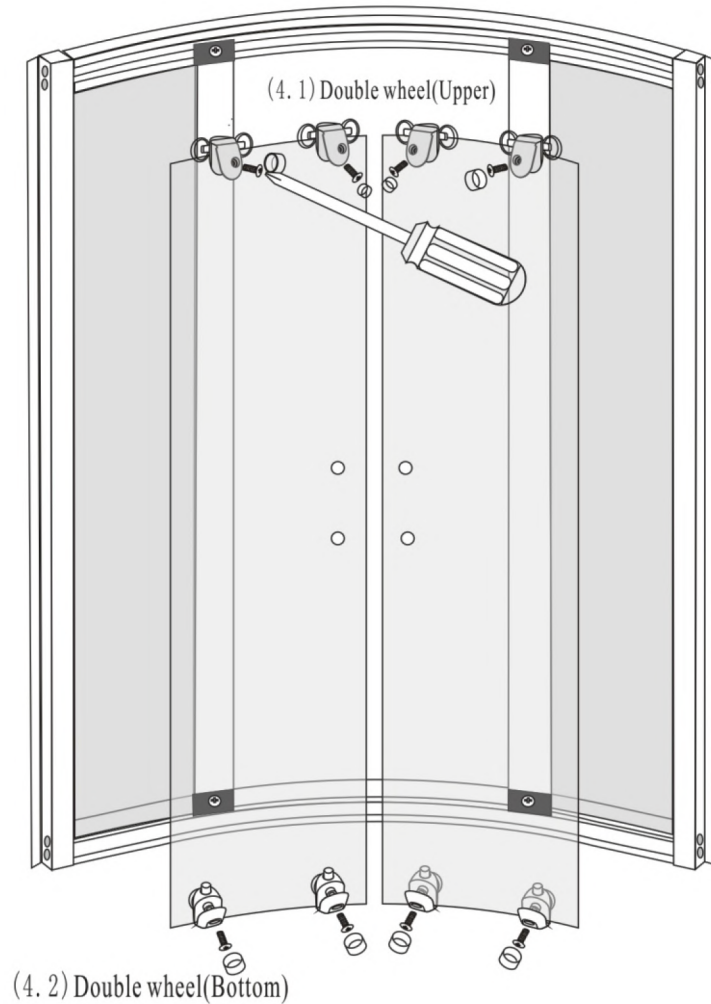


(14)

## 4. Installation Procedure

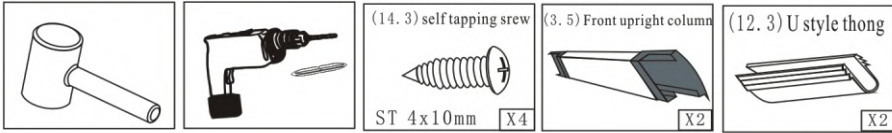


7.) Fit the rubber seal to glass, and use hammer to knock the aluminum panel, to make it fit with glass. Then, fix the aluminum panel by screws.

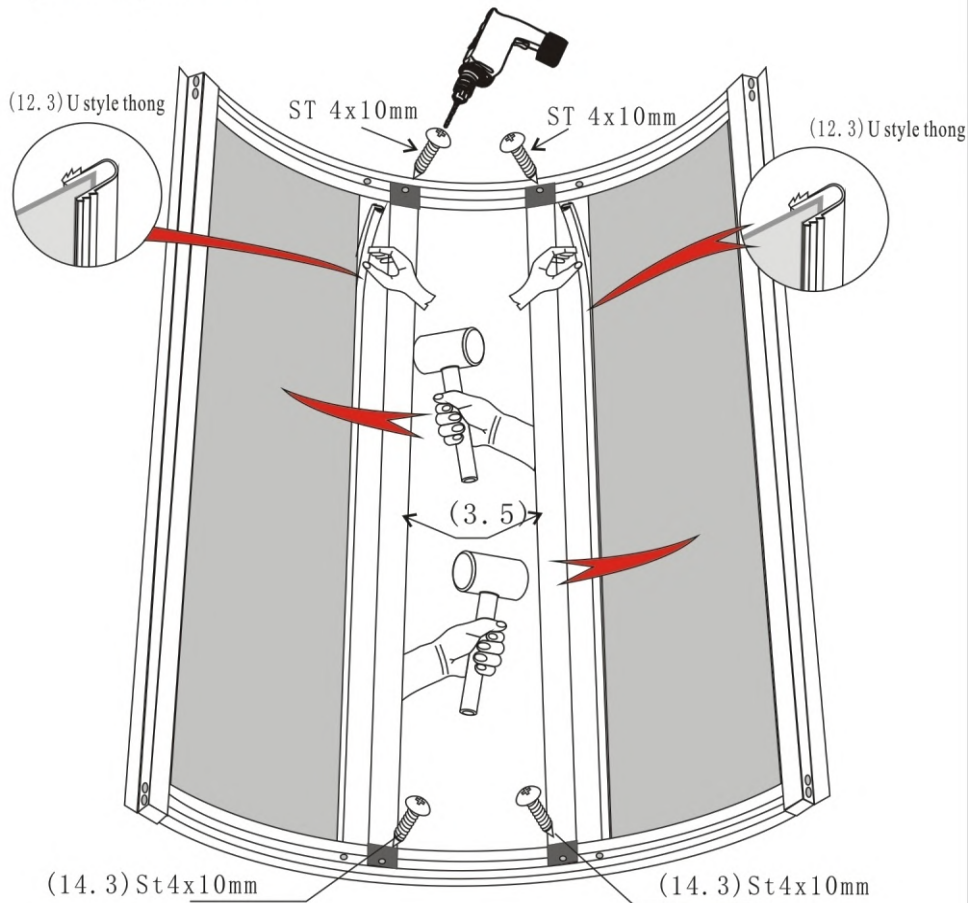


(13)

## 4. Installation Procedure




4.) Fit the soap container, handle shower, and glass holder.

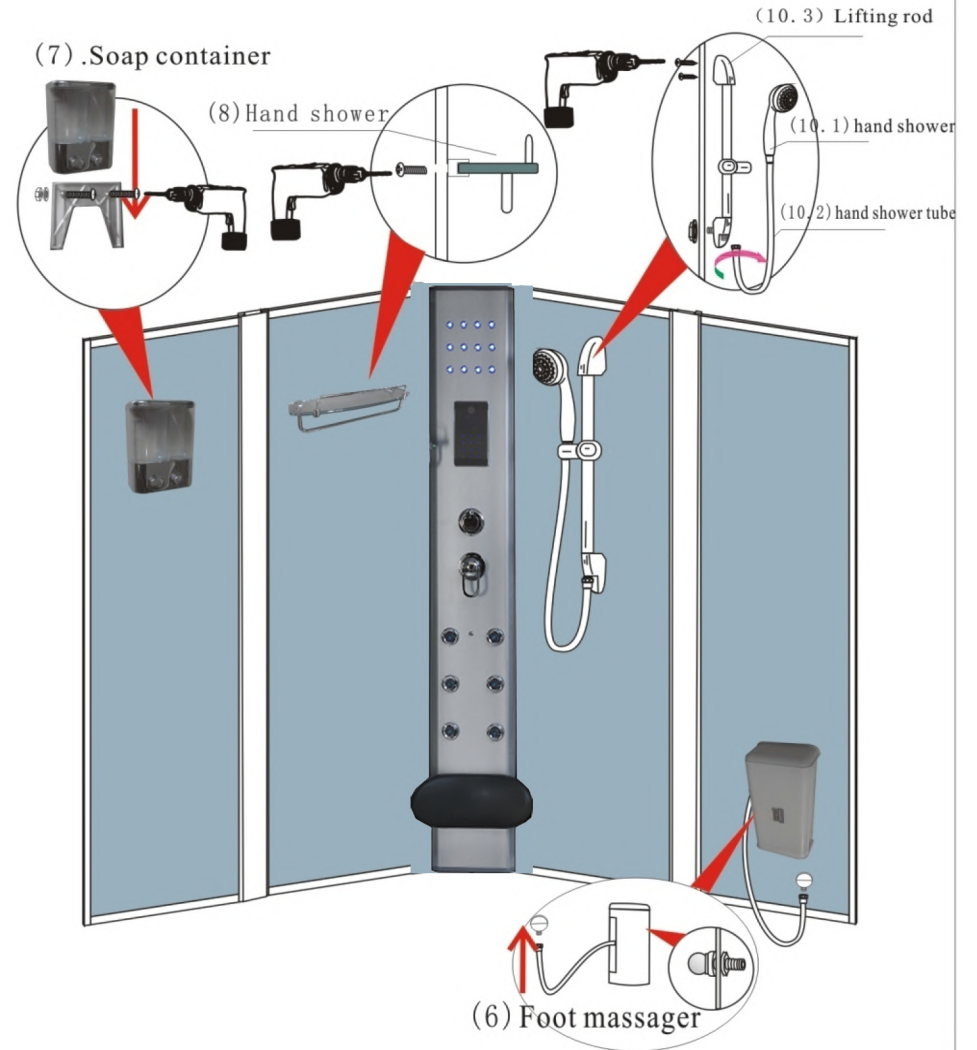


(10)

## 4, Installation Procedure




5. ) Build up the frame. Make sure the rails and upright aluminums are suitable. And find the difference between up rail and down rail.

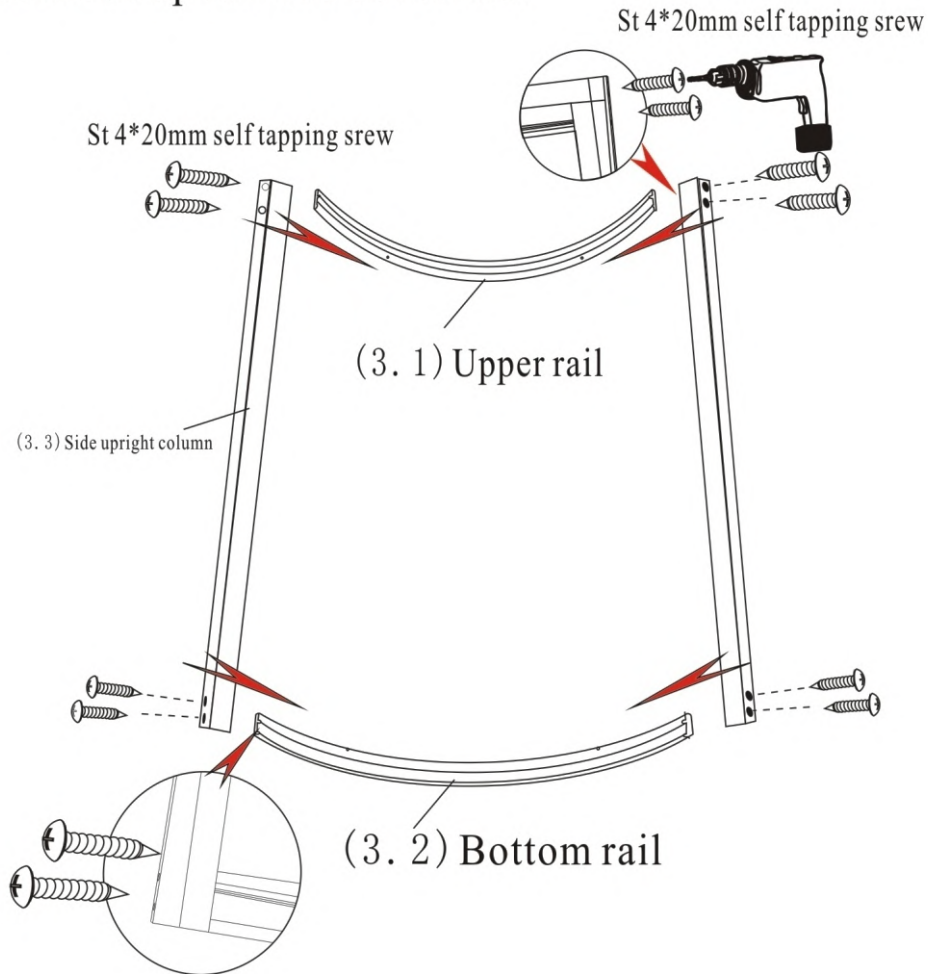


(11)

## 4, Installation Procedure

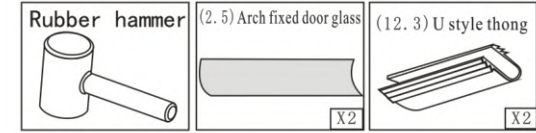

6. ) Fit the fixed glass into the frame, after fitting the rubber seal into glass one side, and then knock the glass carefully by hammer.

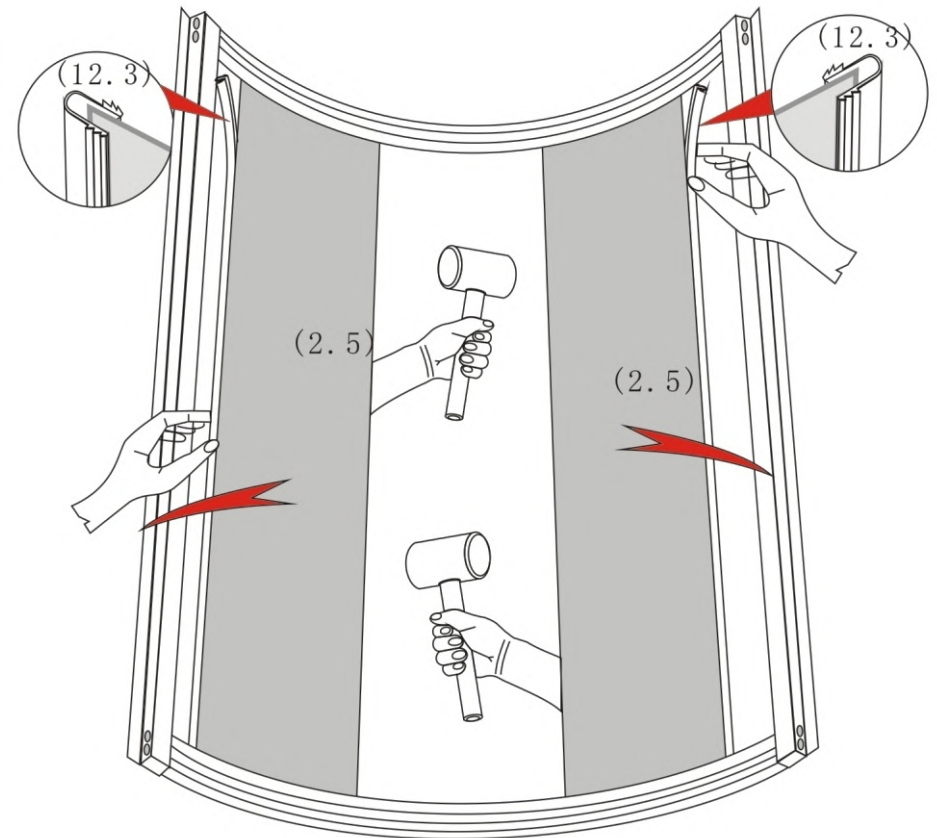

(12)